




NOTES:

- PLACE BOTTOM EDGE OF FENCE INTO 6" DEEP TRENCH AND BACKFILL IMMEDIATELY.
- POSTS SHALL BE 4.0' ON CENTER DRIVEN 2.0' INTO THE GROUND.
- POSTS SHALL BE 2" x2" AND BE MADE OF PINE, HARDWOOD, OR STEEL. MINIMUM LENGTH TO BE 4.5'.
- SILT FENCE SHALL CONFORM TO MnDOT 3886, TYPE B.
- FENCING SHALL BE PLACED ALONG CONTOURS OR AS DIRECTED BY THE ENGINEER.

DESIGN:	DATE:3-08-07
DRAWN:	
REVISIONS	

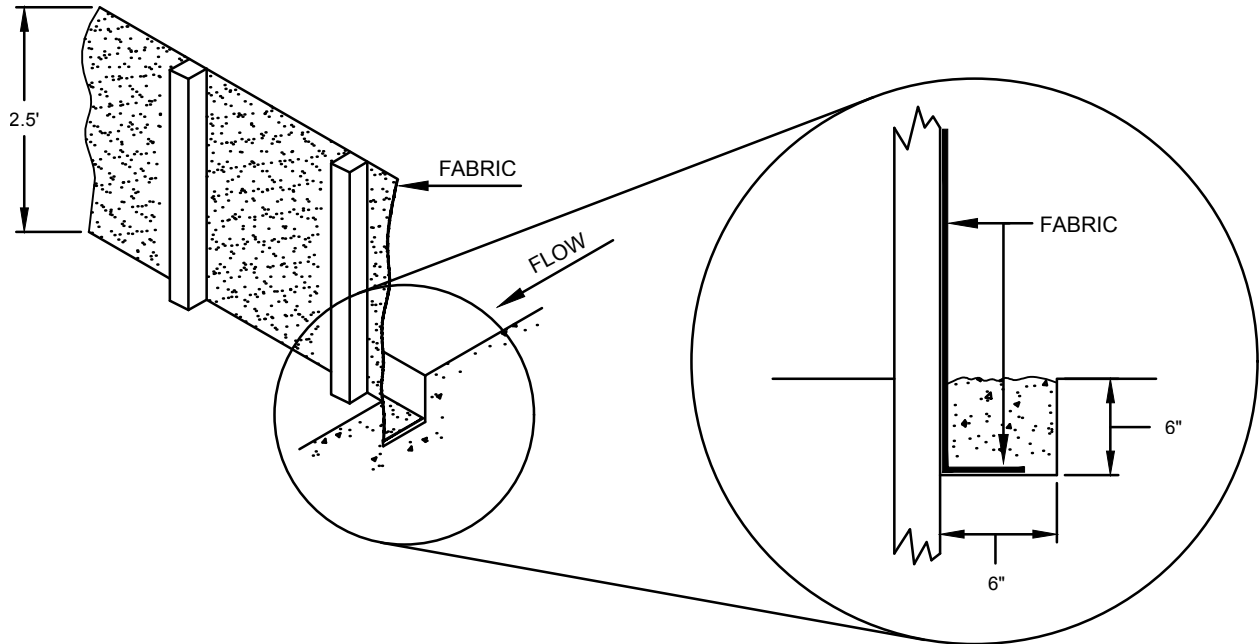

ENGINEERING DEPARTMENT

EROSION CONTROL FENCE

PLATE
NUMBER

EC-1