




NOTES:

- NO WOOD SHALL BE USED FOR ADJUSTING CASTING, CEMENT MORTAR ONLY.
- CAST IRON MANHOLE FRAME & COVER AS PER SPECIFICATIONS.
- MANHOLE STEPS SHALL BE CAST IRON, ALUMINUM OR STEEL REINFORCED PLASTIC PER ASTM C478. STEP LOCATION SHALL BE AS NOTED IN THE SPECIFICATIONS.
- PRECAST REINFORCED CONCRETE MANHOLE SECTIONS PER ASTM C478, FURNISHED WITH O-RING GASKETS AND LUBRICANT EXCEPT AS OTHERWISE SPECIFIED. INSTALL 12" OR 16" BARREL SECTION UNDER THE CONE WHENEVER POSSIBLE.
- PIPE CONNECTIONS TO MANHOLE SHALL BE MADE WATER TIGHT BY CAST INPLACE.

DESIGN:	DATE:
DRAWN:	
REVISIONS	

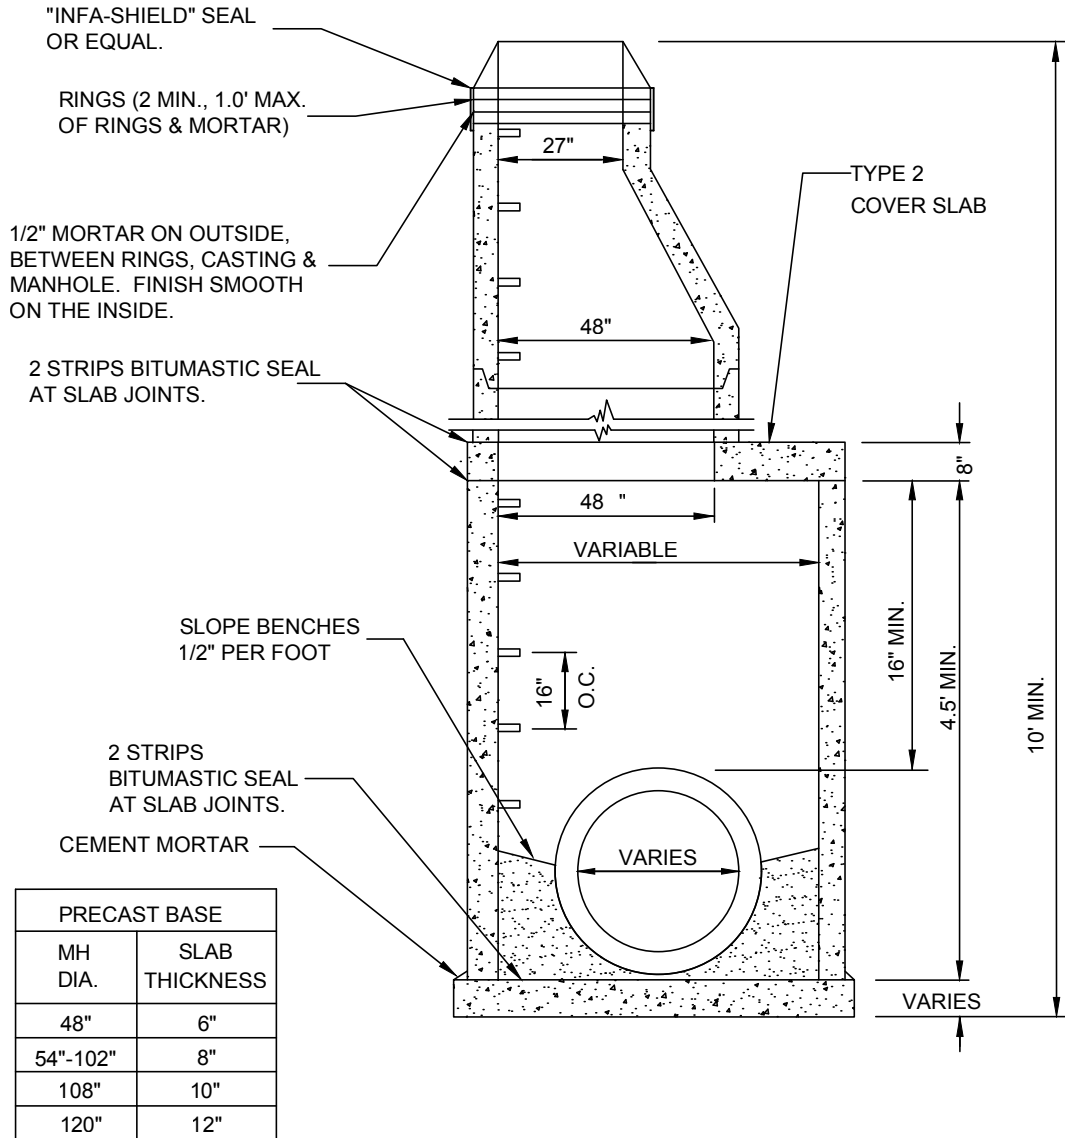

ENGINEERING DEPARTMENT

SANITARY SEWER MANHOLE

(27" OR MORE)

PLATE
NUMBER

S-2